

WB-25

Up to 25 litres per/min fuel polishing system, cleaning fuel to 10 micron, removing free water, bacteria and particulate

- Advanced fuel filter/water separation technology
- 5 stage centrifugal filtration process
- Up to 25 litres per minute flow rate
- Ideal for up to 30,000 litre fuel tanks
- 220v 50hz 1ph AC, 110v 60hz 1ph AC, 24v DC or 12vDC
- 1 x BMS Output 2 x BMS Inputs
- Mounting options include wall, enclosure, frame or portable trolley
- Automatic shutdown when servicing is required
- Manual and Automatic mode
- Simple remote monitoring



Base Model (wall mounted)	WB-25-12	WB-25-24	WB-25-110	WB-25-220
Max flow rate	up to 25 lit/min (6.6 US gal/min)			
Recommended tank size	up to 30,000 Litres (8,000 US gallons)			
Finish options	Wall Mounted, Enclosure, Trolley, Frame mounted			
Particulate removal to	10 Micron			
Control unit	PLC Control			
BMS** outputs	1			
BMS** inputs	2			
Power options	12v DC	24v DC	110v AC	220v AC (0.15kw)
Fuse	5a	2.5a	5a	2.5a
Typical current	2.2a	1a	3a	1.5a
Suction capability	5m max vertical with light spring non-return valve and priming			
Port sizes	1" BSP-P male or NPT			
Pump body	Steel			
Pump type	PTFE Gear			
Shaft	Stainless steel			
Seal	Fluoroelastomer			
Dimensions *	700x700x350mm (27x27x14in)			
Weight *	19kg approx. (41lbs)	19kg approx. (41lbs)	21kg approx. (46lbs)	21kg approx. (46lbs)



CLEANING SPEED

Up to 25 lit/min - ideal for tank sizes



POWER

220v AC, 12vDC
24vDC, 110vAC



INSTALLATION

Wall Mounted, stair climbing trolley, weather-proof casing, frame mounted




ADD-ONS

Drip tray, stainless steel or powder coated mild steel enclosure. frame mounting, beacon and sound alarms, portable options, pre-strainer, white mounting board and final stage filter

* Measurements are for the wall mounted version. Please enquire for measurements for others.

**BMS - Building Management System

*** approximate values

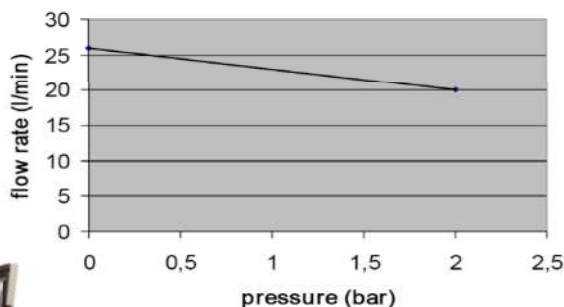

DC curve above, AC curve below

